Technical Data Sheet

VIC-12-220 Video Interface Control By Draper

USES:

The VIC-12-220 replaces the standard 220V AC single-station control switch for all screens or shades where a 12 volt trigger circuit is turned on to lower the product, and turned off to raise the product.

COMPATIBILITY:

The VIC-12-220 is intended as the sole control, and cannot be used with any other control, except the optional override switch (VIC-OS).
Please Note: If VIC-12-220 is built-in, VIC-OS cannot be used.

CONTACTS:

Single-Pole, Double-Throw (Common, Normally Closed, Normally Open).

RATING:

Contacts: 240 Volts, 7 A; 30V DC, 7 A, UL recognized, CSA recognized.
Coil: 12 VDC.
Requires 100 MilliAmps input.

DESCRIPTION:

A relay with COM/NC/NO contacts, and a 12V coil, housed in a metal box.
Box measures 76 x 102 x 127 mm and has three pigtails leading from it:

a. A 229 cm black cord with white, black and white leads for attaching to a 3-pronged plug for constant 220V AC.
b. Two 56 cm wire leads (orange & brown) for switched 12V DC.
c. Four 152 mm wire leads for the motor: blue, red, white, green (up, down, neut., grnd).

PART NUMBER:

121055

ILLUSTRATION:

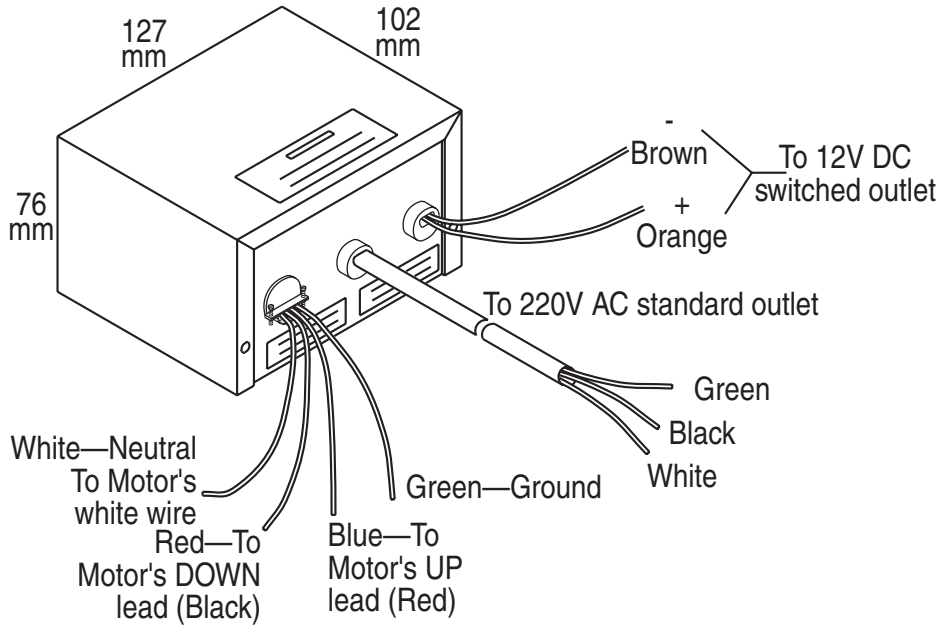

411 S. Pearl St., Spiceland, IN 47385 USA ▮ 765-987-7999
www.draperinc.com ▮ fax 765-987-7142

Copyright ©2010 Draper Inc. Form VIC-12-220_TechDataSheet10 Printed in U.S.A.